


Forming tool with CIRCULAR RIDGES

FW – KW

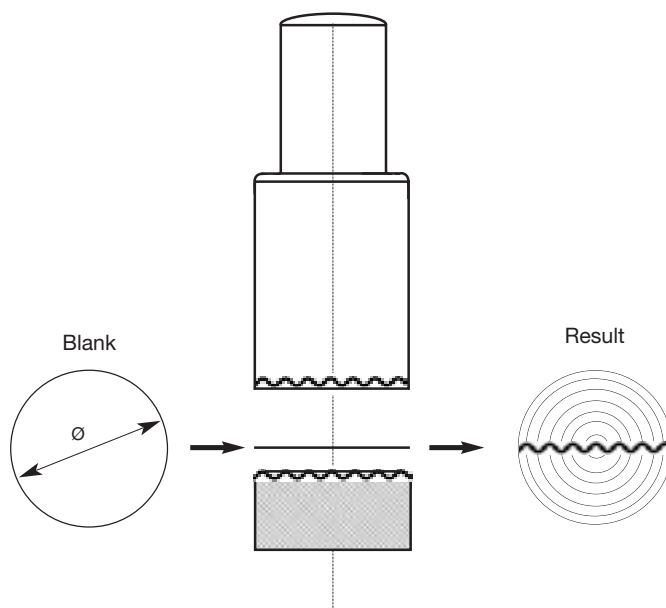

| | | | | | |
|---------|----|--------|------|--------|-------|
| FW - KW | 7 | ridges | Ø 18 | Ø 13,8 | ≡ 1,0 |
| FW - KW | 9 | ridges | Ø 14 | Ø 13,8 | ≡ 1,0 |
| FW - KW | 7 | ridges | Ø 22 | Ø 21,5 | ≡ 1,3 |
| FW - KW | 9 | ridges | Ø 22 | Ø 21,5 | ≡ 1,3 |
| FW - KW | 11 | ridges | Ø 22 | Ø 21,5 | ≡ 1,5 |
| FW - KW | 15 | ridges | Ø 22 | Ø 21,5 | ≡ 0,8 |
| FW - KW | 9 | ridges | Ø 28 | Ø 27,5 | ≡ 1,5 |
| FW - KW | 19 | ridges | Ø 28 | Ø 27,5 | ≡ 0,8 |
| FW - KW | 11 | ridges | Ø 34 | Ø 33,5 | ≡ 1,5 |
| FW - KW | 23 | ridges | Ø 34 | Ø 33,5 | ≡ 0,8 |

Material thicknesses up to 0,5 mm. All dimensions are in mm.

These tools must always be used in conjunction with the corresponding **A,Z&F** punching, centering and forming tools.

HANSJÖRG FRITSCHÉ
Gold- and Silversmith